


## SRD040-3P/17S 盘式导电滑环

### SRD040-3P/17S Pancake Slip Ring

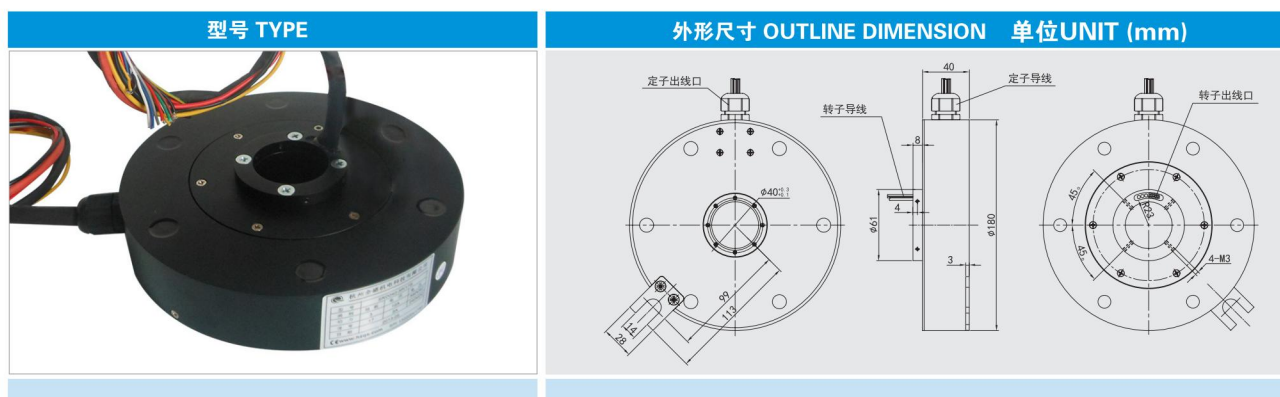

#### 电气技术指标 Electrical data

| 参数 Specification           | 数值 Values  |
|----------------------------|--|
| 路数 NO. of Circuits         | 20   |
| 额定电流 Rated Current         | 15A/路, 3路; 5A/路, 17路<br>15A/ring (power), 3 rings; 5A/ring (signal), 17rings |
| 导线规格 Lead Size             | 镀锡导线、铁氟龙绝缘AWG16 tin plated, PTFE insulated or PVC                            |
| 导线长度 Lead Length           | 500/1000mm或根据客户要求提供 500/1000mm (or as request)                               |
| 绝缘体强度 Dielectric Strength  | 500VAC@50Hz, 60S   |
| 绝缘电阻 Insulation Resistance | $\geq 500M\Omega / 500VDC$   |

#### 机械技术指标 Mechanical data

| 参数 Specification        | 数值 Values                        |
|-------------------------|----------------------------------|
| 额定转速 Rated Speed        | 0~250rpm                         |
| 工作温度 Temperature Range  | $-20^{\circ}C \sim +80^{\circ}C$ |
| 工作湿度 Operating Humidity | 60%RH 或更高 60%RH or higher        |
| 接触材料 Contact Material   | 贵金属 Precious Metals              |
| 壳体材料 Housing Material   | 铝合金 Aluminum alloy               |
| 防护等级 Protection level   | IP51                             |